


CLC150-deg120




CLC150-deg60-90

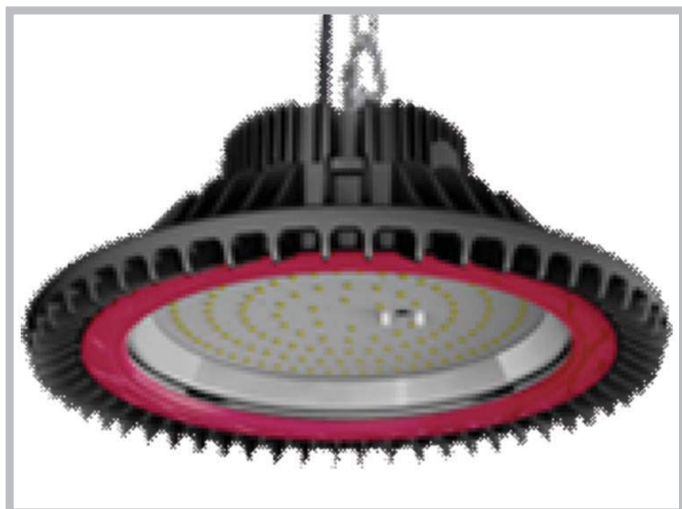

Référence	Angle de Diffusion	Puissance	Couleur Température	Flux Lumineux
CLC150-deg120-3000	120°	150 w	3000K	13500 lm
CLC150-deg120-4000	120°	150 w	4000K	14250 lm
CLC150-deg120-6000	120°	150 w	6000K	15000 lm
CLC150-deg90-60-3000	60° - 90°	150 w	3000K	10500 lm
CLC150-deg90-60-4000	60° - 90°	150 w	4000K	11250 lm
CLC150-deg90-60-6000	60° - 90°	150 w	6000K	12000 lm

Caractéristiques Luminaire

Tension d'alimentation	Fréquence	Température de Fonctionnement	IRC	IP	Angle de Diffusion	Alimentation	Diode	Durée de Vie	Garantie	Option
AC 100 - 277 V	50 - 60 Hz	de -20° à +50°	70	65	120°	Meanwell HBG	Philips SMD3030	35 000 h	3 ans	Variation 1-10V
AC 100 - 277 V	50 - 60 Hz	de -20° à +50°	70	65	60° - 90°	Meanwell HBG	Epistar COB 33mil	35 000 h	3 ans	Variation 1-10V

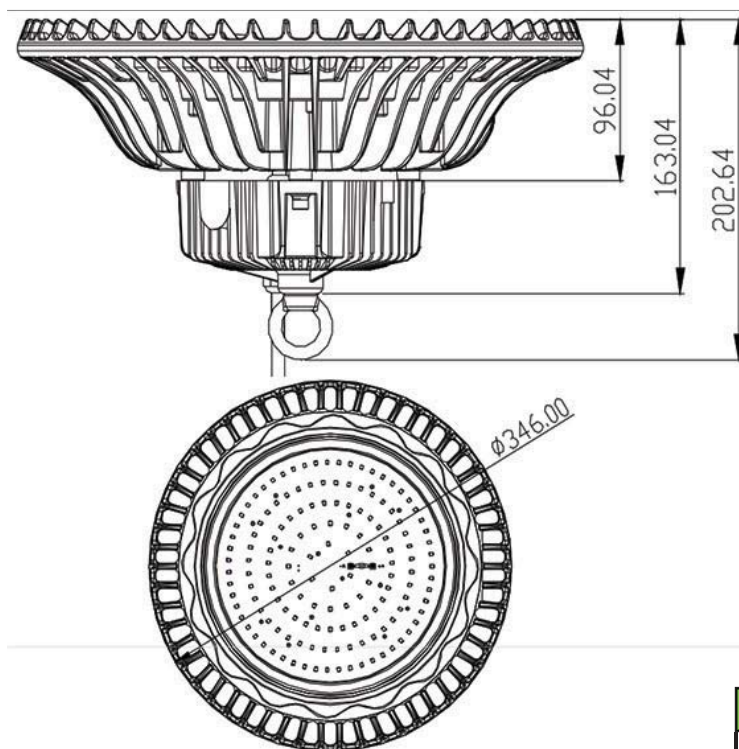

Certifications

CE - RoHS - IEC EN60598 - ISO 9001:2008