

LED Intelligent Driver

36W 1.5A 24Vdc

- Dimming interface: Triac/ELV, Push DIM.
- Apply to leading edge and trailing edge TRIAC dimmers.
- Built-in high performance MCU, dimming curve can be customized.
- PWM digital dimming, no alter LED color temperature.
- Dimming range: Max. 0.1~100%.
- Efficiency > 87%.
- Short circuit / Over-heat / Over load protection.
- Class 2 power supply. Full protective plastic housing.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor environments.



Dimmable:  
0.1%~100%



Main Characteristics

Dimming Interface: Triac/ELV, Push DIM  
 Input Voltage Range: 200-240Vac ±10%  
 Frequency: 50/60Hz  
 Input Current: 230Vac ≤ 0.4A  
 Efficiency: > 87%  
 Inrush Current(typ.): Cold start 40A at 230Vac  
 Control Surge Capability: L-N: 1kV  
 Leakage Current: < 0.5mA/230Vac  
 Output Current: Max. 1.5A  
 Output Voltage: 24Vdc  
 Output Voltage Range: 24Vdc ±0.5Vdc  
 Ripple & Noise: ≤ 120mV

Output Power: Max. 36W  
 Output Power Range: 1~36W  
 Overload Power Limitation: ≥ 102%~125%  
 PWM Frequency: 200Hz-500Hz  
 Dimming Range: Max. 0.1~100%.  
 Working Temperature.: tc: 70°C ta: -30°C ~ 55°C  
 Working Humidity: 20 ~ 95%RH, non-condensing  
 Storage Temp., Humidity: -40 ~ 80°C, 10~95%RH  
 Temp. Coefficient: ±0.03%/°C(0-50°C)  
 Vibration: 10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes

\* The dimming range parameters adopted LUTRON® dimming system as testing standards. The parameters may differ by using Triac/ELV dimming systems of different brands. We can customize program for clients' high requirements.

Attn: LUTRON® is registered trademarks of Lutron Electronics Co., Inc. registered in the U.S. and other countries

Protection

Over-heat Protection: Shut down the output when PCB temp. ≥ 110°C, auto recovers when temp. back to normal.  
 Over Load Protection: Shut down the output when Current Load ≥ 102%~125%, auto recovers after faulty condition is removed.  
 Short Circuit Protection: Shut down automatically if short circuit occurs, auto recovers after faulty condition is removed.


Safety & EMC


Withstand Voltage: I/P-O/P: 3750Vac  
 Isolation Resistance: I/P-O/P: 100MΩ/500VDC/25°C/70%RH  
 Safety Standards: IEC/EN61347-1, IEC/EN61347-2-13  
 EMC Emission: EN55015, EN61000-3-2 Class C, IEC61000-3-3  
 EMC Immunity: EN61000-4-2,3,4,5,6,8,11 EN61547

Others

Dimension: 175×44×30mm(L×W×H)  
 Packing: 178×48×33mm(L×W×H)  
 Weight[G.W.]: 185g±10g

Dimensions

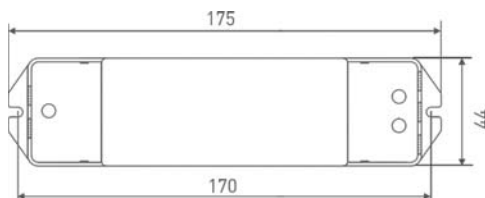


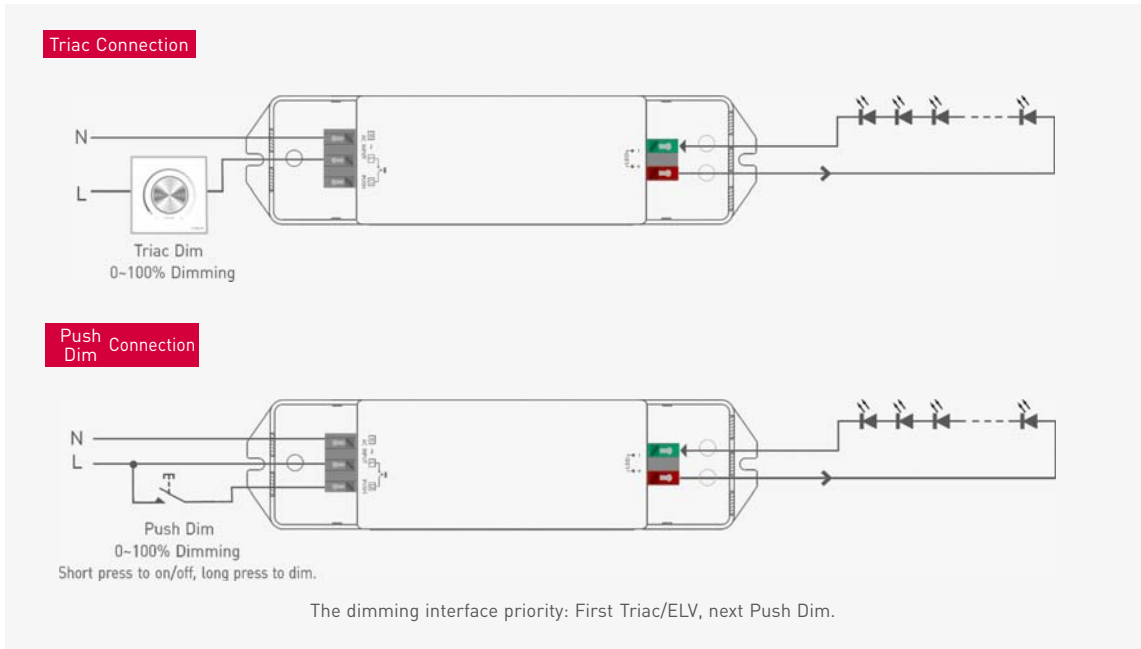

### Selecting between ordinary dimmer and dimming system

Ordinary dimmer and dimming system have different dimming precision, precision of dimming system is higher. To meet customers' requirements on perfect dimming effects, we LTECH designed two programme options.

Method: Turn off the power and then remove the housing of the LED driver to find right component on the PCB. Shift system by selecting different contact pin (For installation professionals use only). Factory default as common (For ordinary dimmer).



### Push Dimming



Reset Switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.