

## DALI touch panel



DA2




## 1. Technical Specs:

- Power Supply: DALI Power
- Output Signal: DALI
- Dimming Key: 2CH Control
- Working Temperature: -20°C~60°C

- Dimensions: L86×W86×H36(mm)
- Package Size: L113×W112×H50(mm)
- Weight(G.W.): 200g


## 2. Product Size:



## 3. Installation Instruction:



## 4. Key Functions:



2CH Switch  
Long press to  
adjust brightness

## 5. Terminals:




Power and Signal  
Combined Socket

Dip Switch

## 6. Dip Switch Operation:

Via dip switch, you can set 64 single addresses (0-63), 16 group addresses (0-15), 16 scene addresses (0-15) and broadcast address.

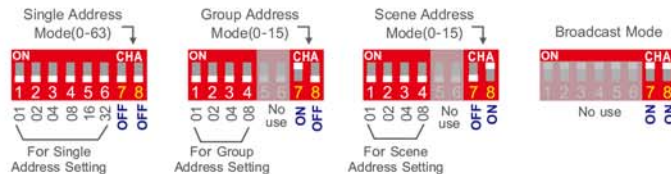

Total address value = the sum of the dip switch value, to get the place value when in "on" position, otherwise will be 0.

E.g.1: Set initial address to 40 in Single Address Mode. E.g.2: Set initial address to 5 in Group Address Mode.



## 7. Wiring Diagram:

